

IMPERIUM

PRODUCT SPECIFICATIONS

IGNIS IMPERIUM

MAIN PURPOSE

- Portable Pressure and Flow Measurement for fixed installation Fire Hose Reels and Hydrants

MEASUREMENT

- Static & Dynamic Flows/Pressures
- 20mm Hose Reel connections
- 65mm Hydrant connections


OPERATING PARAMETERS

- MAX Flow: 1800 lpm
- MAX Pressure: 16 bar
- Battery Powered
- *Flow meters can be changed out to suit the application*



CHASSIS CONSTRUCTION

- Mild steel square tube frame
- Mild steel cladding
- Powder Coated Red & Black
- 4x 100mm Lockable Rubber Wheels



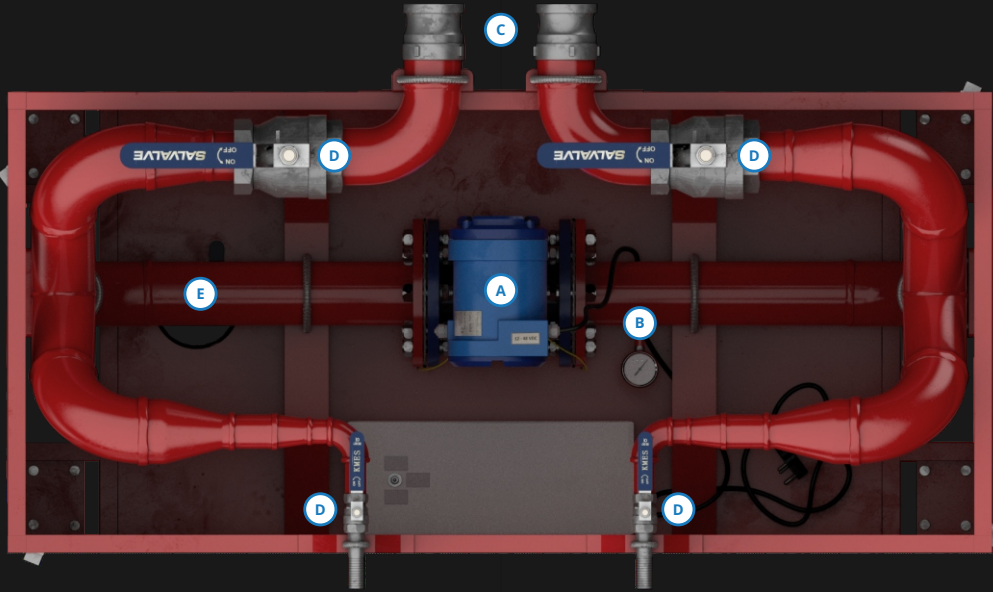

0,8 METERS

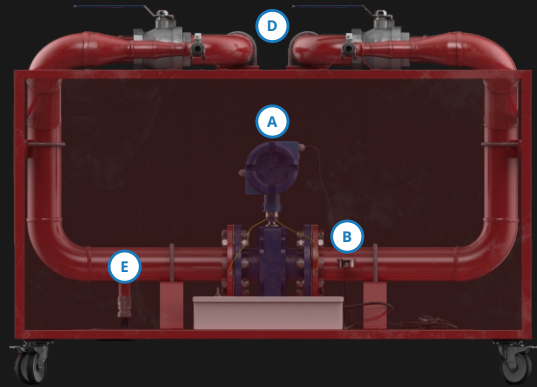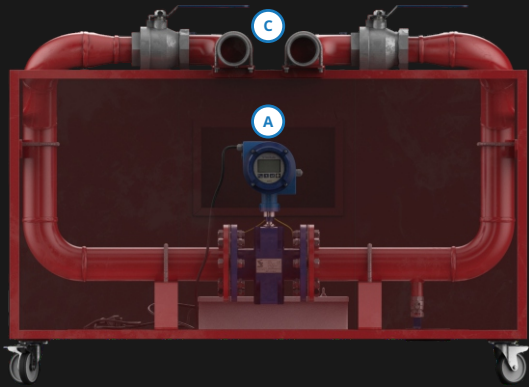

0,9 METERS

1,2 METERS

- A** Flowmeter (0.5% Accuracy)
- B** Pressure Gauge (0-25 Bar)
- C** 65mm Hydrant Couplings
- D** Ball Valves
- E** Drainage Port




A FLOWMETER




B PRESSURE GAUGE



C 65mm COUPLING

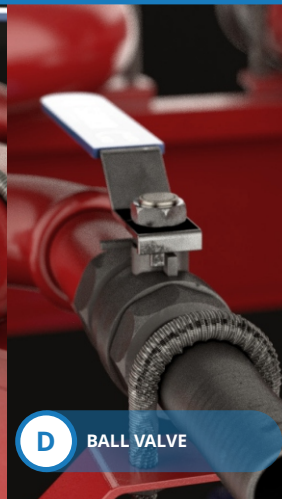

D BALL VALVE

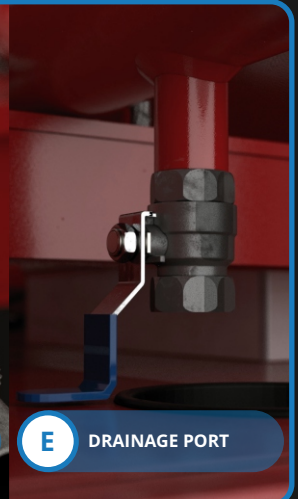

E DRAINAGE PORT